


### Product specifications:

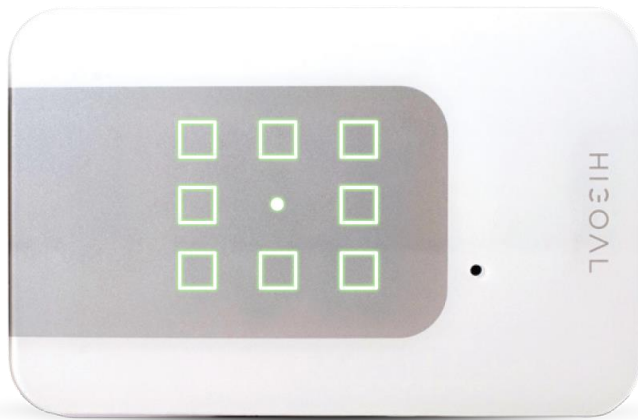

<b>IR SENSOR:</b>	Built-in
<b>Mini speaker:</b>	Built-in
<b>Rated Voltage:</b>	AC 110-230V, 50/60 Hz
<b>Standby current:</b>	60ma
<b>Updates:</b>	Firmware Over The Air (FOTA)
<b>Front panel:</b>	<ul style="list-style-type: none"> <li>• 1.5 mm glass cover</li> <li>• 8 operating buttons + 1 function button</li> <li>• RGB LED indicator for each button</li> </ul>
<b>LED indicator:</b>	Different color indicator for each operating mode
<b>Dip Switch:</b>	10 mini switches
<b>Operating frequency:</b>	2400-2483 MHz
<b>Transmission power:</b>	0.04w
<b>Transmission bandwidth:</b>	20 MHz
<b>Wi-Fi Frequency:</b>	2.4GHz 802.11b/g/n
<b>Modulation:</b>	DSSS, CKK, OFDM
<b>Weight:</b>	0.167 KG
<b>Energy metering range:</b>	50-2000w

**Outputs:** 6 x 5A (each)

### Options:

- 8 operations buttons:
  - 6 programmable outputs
  - 2 for additional functions (Scenario, Duplicate)
- On/off, momentary switch, curtain, Scenario, Duplicate
- 6 On/Off or 3 electric shutters or any other combination

